P/N MDL-2410

Marine Blade Lock for Fire Doors

Cerradura de paleta para puertas cortafuego

Blade-key fire-door lock for ships. Door thickness 38–45 mm. The catalog gives full door-preparation drawings: door-edge pocket, door-face cutout, frame rebate and frame strike. Opening direction depends on a left- or right-hand door.

Genuine OEM equivalent available on request.

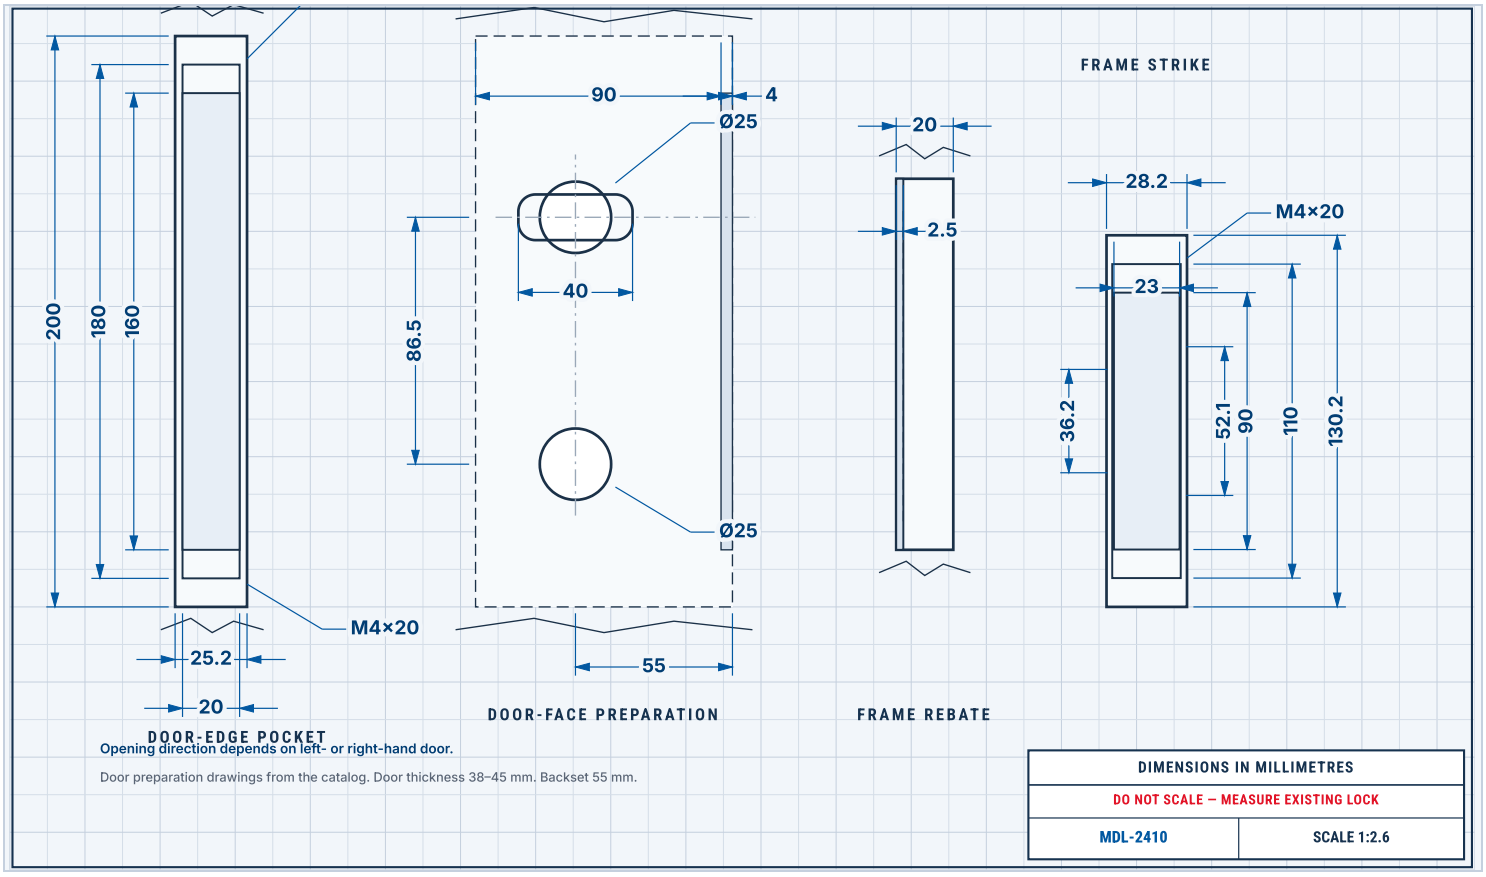

REPLACEMENT DIMENSIONS

Part number	MDL-2410
Type	Blade-key fire-door lock
Door thickness	38–45 mm
Backset	55 mm
Door-edge pocket	200 / 180 / 160 mm nested heights; inner width 20 mm, outer 25.2 mm
Pocket fixing	M4 × 20 screws
Door-face preparation	90 mm wide; 4 mm land; Ø25 mm holes; 40 mm spindle cutout; 86.5 mm between holes
Frame rebate	20 mm with a 2.5 mm rebate
Frame strike	28.2 mm wide (inner 23 mm); heights 130.2 / 110 / 90 / 52.1 / 36.2 mm; M4 × 20
Handing	Opening direction depends on left- or right-hand door
Spindle size	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (38–45 mm range)
- Backset 55 mm
- Door-edge pocket 200 × 25.2 mm (inner 160 × 20 mm)
- Face cutout: Ø25 holes, 40 mm spindle slot, 86.5 mm centres
- Frame strike 130.2 mm high × 28.2 mm and rebate 20 / 2.5 mm
- Left- or right-hand door (opening direction)
- M4 × 20 fixing screws

KEY FEATURES

- Blade-key structure, for ship fire doors
- Door thickness 38–45 mm; backset 55 mm
- Full door-preparation drawings in the catalog
- Opening direction depends on left- or right-hand door
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082