P/N MDL-2910

Marine Sliding Fire-Door Lock

Cerradura cortafuego para puerta corrediza

Hook-style lock for fire sliding doors on ships, supplied with strike and mounting plates. Door-preparation holes and the 80 mm prep width are the critical replacement dimensions. Door thickness is not numbered on the drawing (shown as L).

Genuine OEM equivalent available on request.

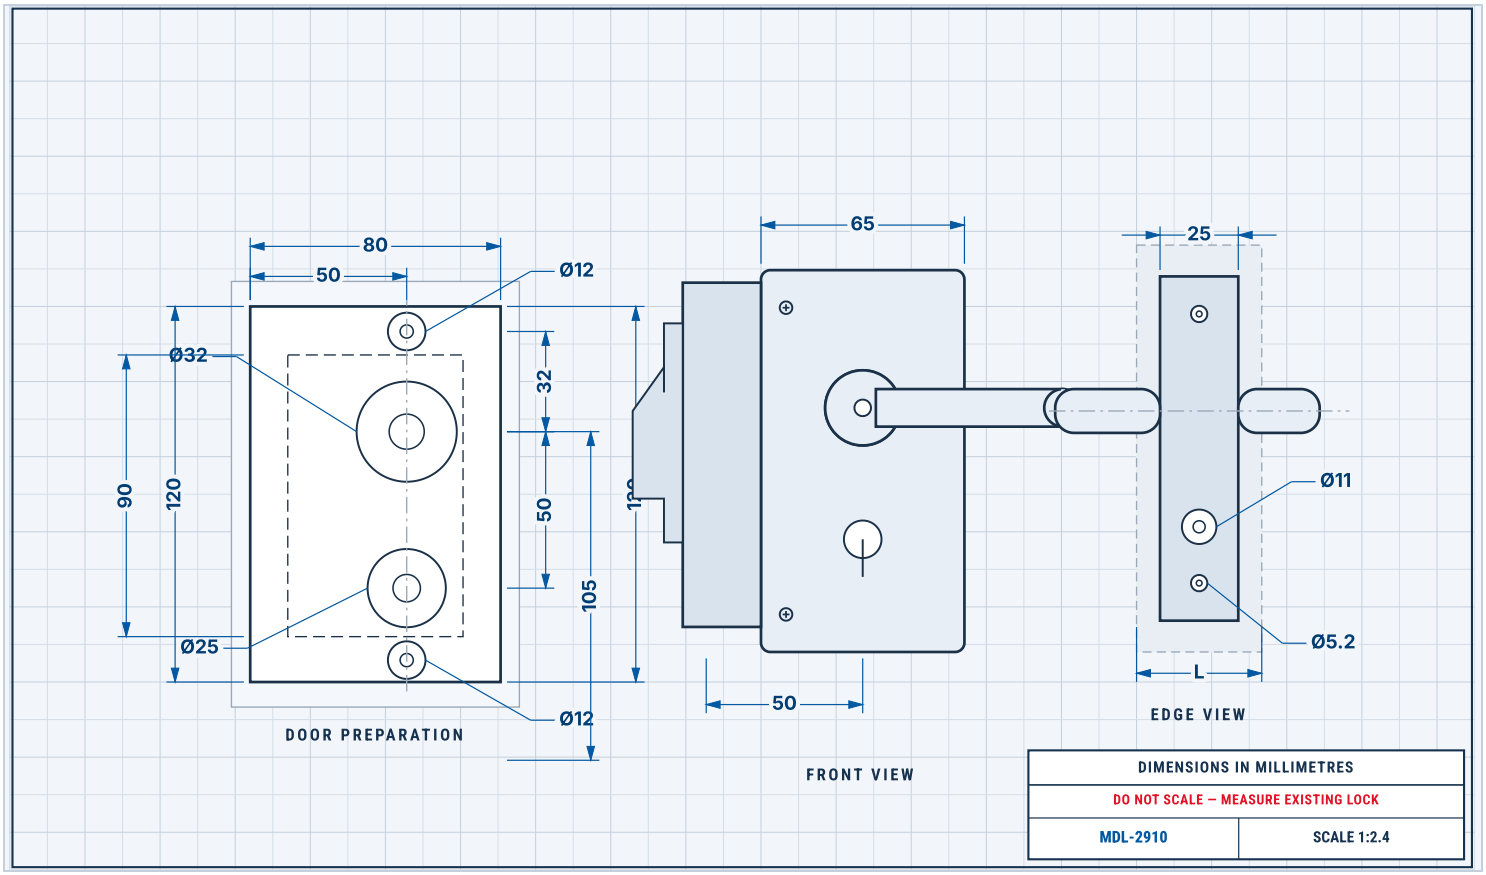

REPLACEMENT DIMENSIONS

Part number	MDL-2910
Type	Sliding fire-door hook lock
Door thickness	Not numbered (L on the edge view) — measure the existing door
Door preparation width	80 mm overall; 50 mm to the hole centreline
Prep holes (top to bottom)	Ø12, Ø32 (handle / spindle), Ø25 (cylinder / key), Ø12
Prep vertical spacing	32 mm (top Ø12 to Ø32); 50 mm (Ø32 to Ø25); 105 mm and 120 mm also labelled
Prep inner dashed height	90 mm; outer height 120 mm
Lock body front width	65 mm
Handle centre	50 mm from the labelled left-hand reference
Forend / face width	25 mm
Fixing holes	Ø5.2 mm; also Ø11 mm on the face
Hook throw / hook-plate height / spindle / handing	Not clearly labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Confirm the existing door is a fire sliding door (hook lock, not a hinged-door mortise)
- Door-prep width 80 mm and 50 mm to the hole centreline
- Hole diameters Ø12 / Ø32 / Ø25 / Ø12 and the 32 / 50 mm pitches
- Outer prep height 120 mm and inner dashed 90 mm
- Body front width 65 mm and 50 mm to the handle centre
- Forend width 25 mm; fixing holes Ø5.2 and Ø11
- Door thickness L — not numbered; measure the existing door
- Hook throw and hook-plate height (not clearly labelled)

KEY FEATURES

- Hook-style sliding lock for ship fire sliding doors
- Exploded set with strike and mounting plates
- Door-preparation drawing with Ø12 / Ø32 / Ø25 / Ø12 hole group
- Genuine OEM equivalent available on request

PRODUCT

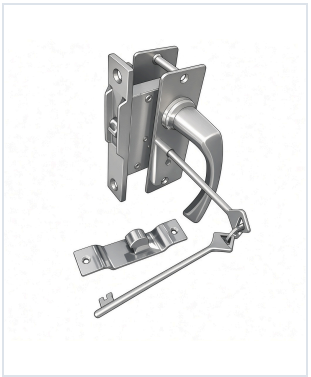

www.mantto.com
sales@mantto.com
+1 956 627 1082