MANTTO OFFSHORE
WWW.MANTTO.COM

PRODUCT SPECIFICATION SHEET
MDL-5600

P/N MDL-5600

Marine Cabin / Fire-Door Lock, Blade Key

Cerradura de embutir para cabina / puerta cortafuego, llave de paleta

Cabin and all-grade fire-door lock with a blade-key mechanism. Double bolts, single knob. Opened by key from inside and outside, and by the knob inside. Door thickness 36–45 mm.

Genuine OEM equivalent available on request.

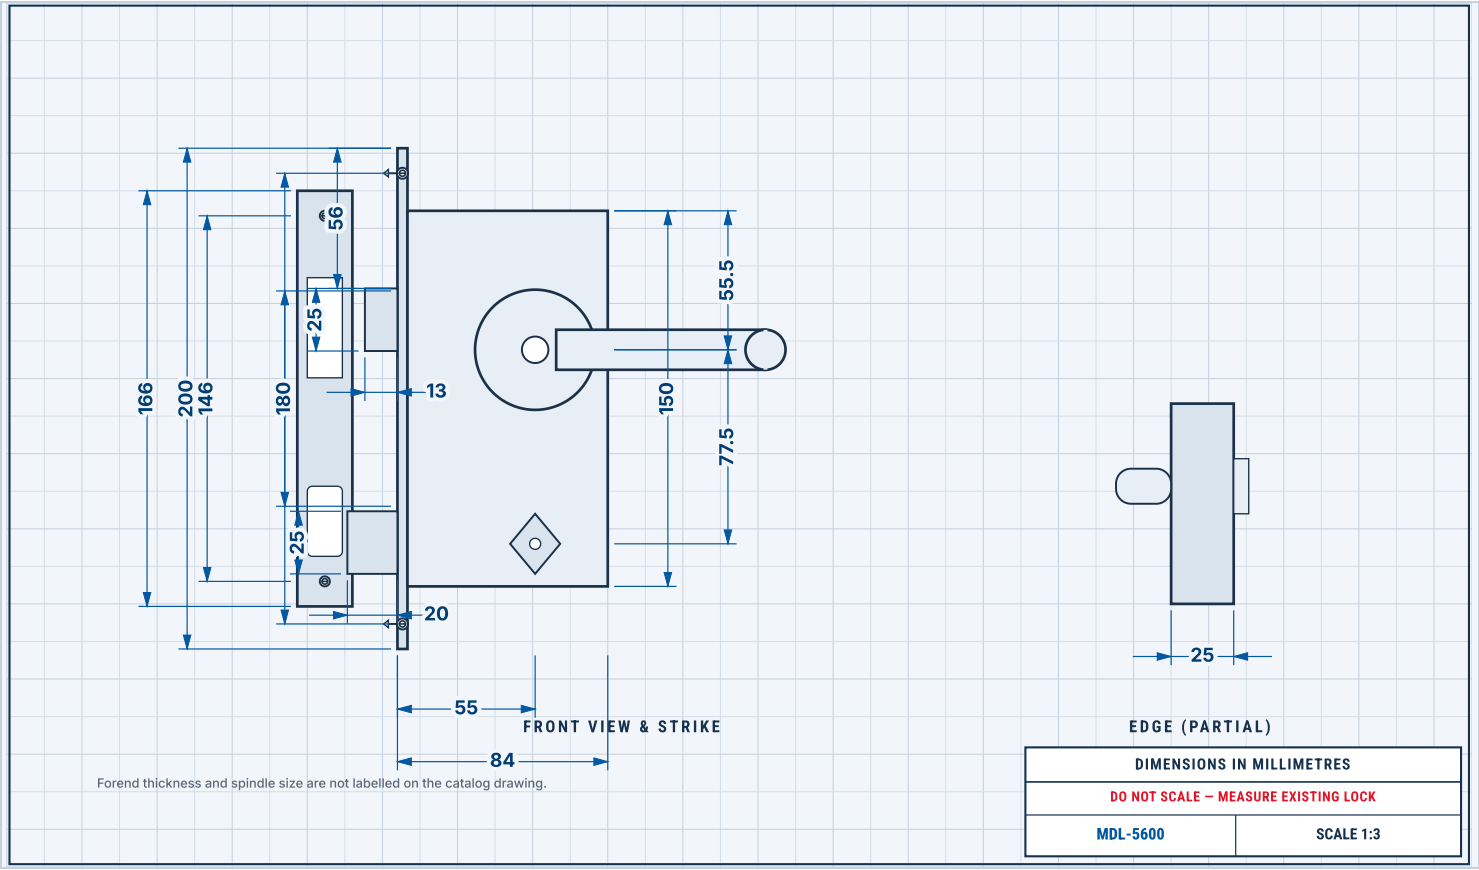

REPLACEMENT DIMENSIONS

Part number	MDL-5600
Type	Cabin / fire-door mortise lock, blade key
Door thickness	36–45 mm
Backset	55 mm
Lock case	84 mm depth (incl. forend) × 150 mm height
Forend (faceplate)	200 mm high; fixing centres 180 mm; mid 86 mm
Forend thickness	Not labelled
Strike plate	166 mm high; fixing centres 146 mm
Upper latch	56 mm from the top; 25 mm high; 13 mm throw
Lower bolt	25 mm high; 20 mm throw
Handle position	55.5 mm from top of case; 77.5 mm onward
Spindle size / handing	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (36–45 mm range)
- Backset 55 mm
- Forend 200 mm high, screw centres 180 mm
- Case 84 × 150 mm
- Strike 166 mm / centres 146 mm
- Throws 13 mm (latch) and 20 mm (bolt)
- Blade keyway vs. the existing cylinder
- Spindle size and handing (not labelled)

KEY FEATURES

- For cabin doors and all-grade fire-proof doors
- Blade-key locking mechanism
- Double bolts, single knob
- Opened by key both sides, and by the inside knob
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082