P/N MDL-C-1

Marine Cabin / Fire-Door Mortise Lock

Cerradura de embutir para cabina / puerta cortafuego

Mortise lock for marine cabin and fire-grade doors. Outside cylinder and inside knob; master-key system. The inclined latch is windproof and is opened by the lever or the key. The square deadbolt is locked and operated by the inside knob and the outside key. Door thickness 36–45 mm.

Genuine OEM equivalent available on request.

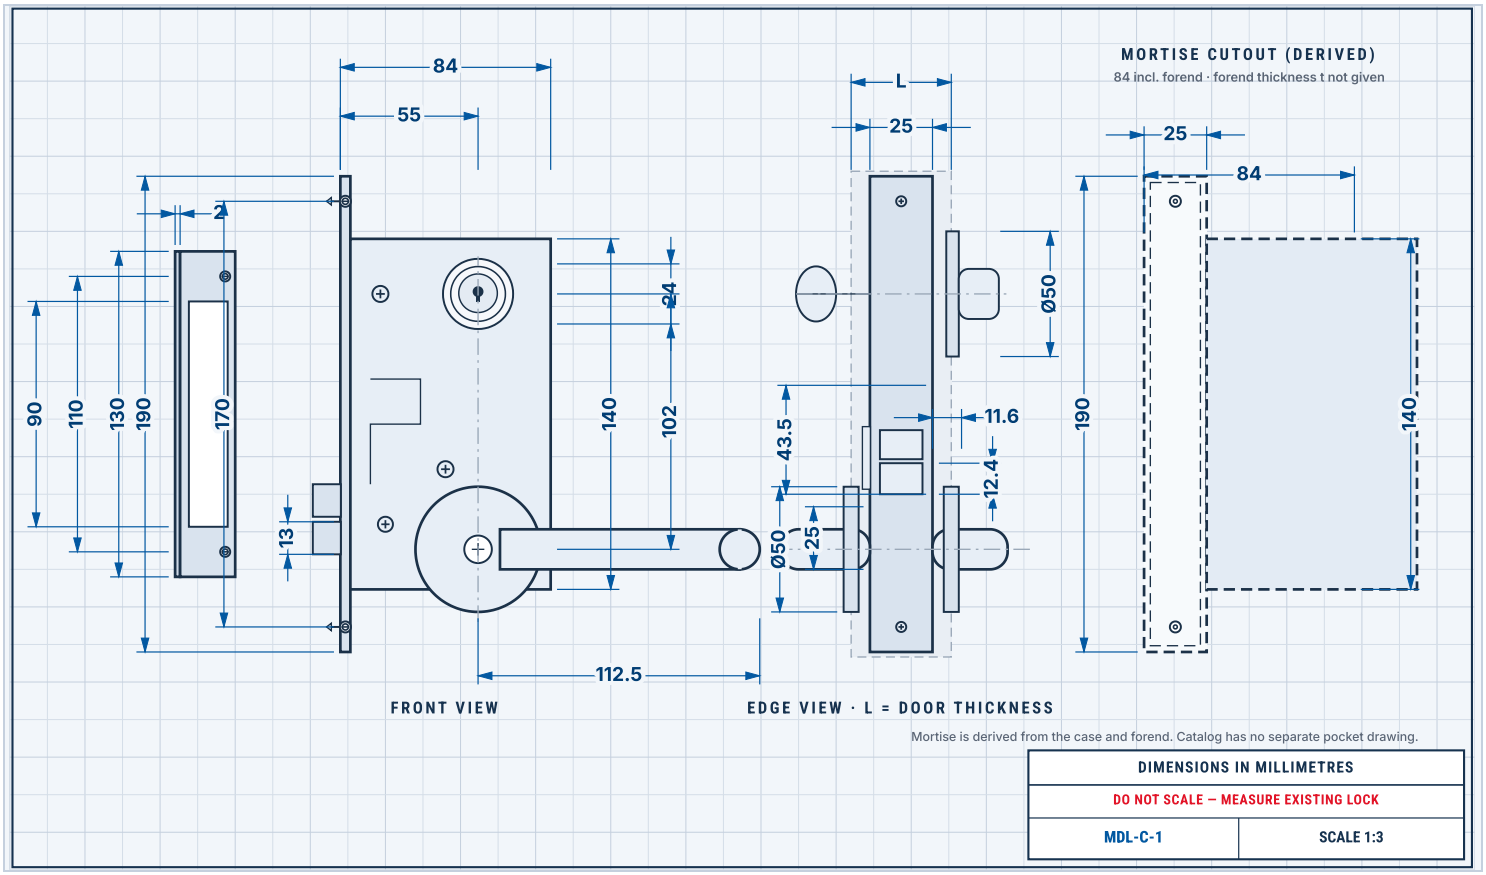

REPLACEMENT DIMENSIONS

Part number	MDL-C-1
Type	Cabin / fire-door mortise lock
Door thickness	36–45 mm
Backset	55 mm
Lock case	84 mm depth (incl. forend) × 140 mm height
Forend (faceplate)	190 mm high × 25 mm wide; fixing centres 170 mm
Forend thickness	Not labelled (C-1A drawing of the same forend shows 4 mm)
Strike plate	130 mm high; opening 90 mm; fixing centres 110 mm; lip 2 mm
Lever length	112.5 mm (spindle centre to tip)
Handle / cylinder roses	Ø50 mm (edge view)
Cylinder housing	24 mm; cylinder-to-spindle 102 mm
Latch / bolt stack (edge)	11.6 / 12.4 / 43.5 mm
Spindle size / handing / throw	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (36–45 mm range)
- Backset, forend face to spindle (55 mm)
- Forend size and screw centres (190 × 25, 170 mm)
- Case size (84 incl. forend × 140 mm)
- Strike height, opening and screw centres
- Handle / rose diameter (Ø50 mm)
- Mortise pocket vs. existing door cutout
- Spindle size, handing and bolt throw (not labelled)

KEY FEATURES

- Outside cylinder with inside knob; master-key system
- Inclined windproof latch, opened by lever or key
- Square deadbolt operated by inside knob and outside key
- Supplied with strike plate
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082