P/N MDL-C-1A

Marine Door Lock, Bi-Cylinder

Cerradura de embutir de dos cilindros

Bi-cylinder variant of the cabin / fire-door mortise lock. Two cylinders, two square bolts; the two keys are operated in parallel from the outside. Other features as MDL-C-1. Door thickness 36–45 mm.

Genuine OEM equivalent available on request.

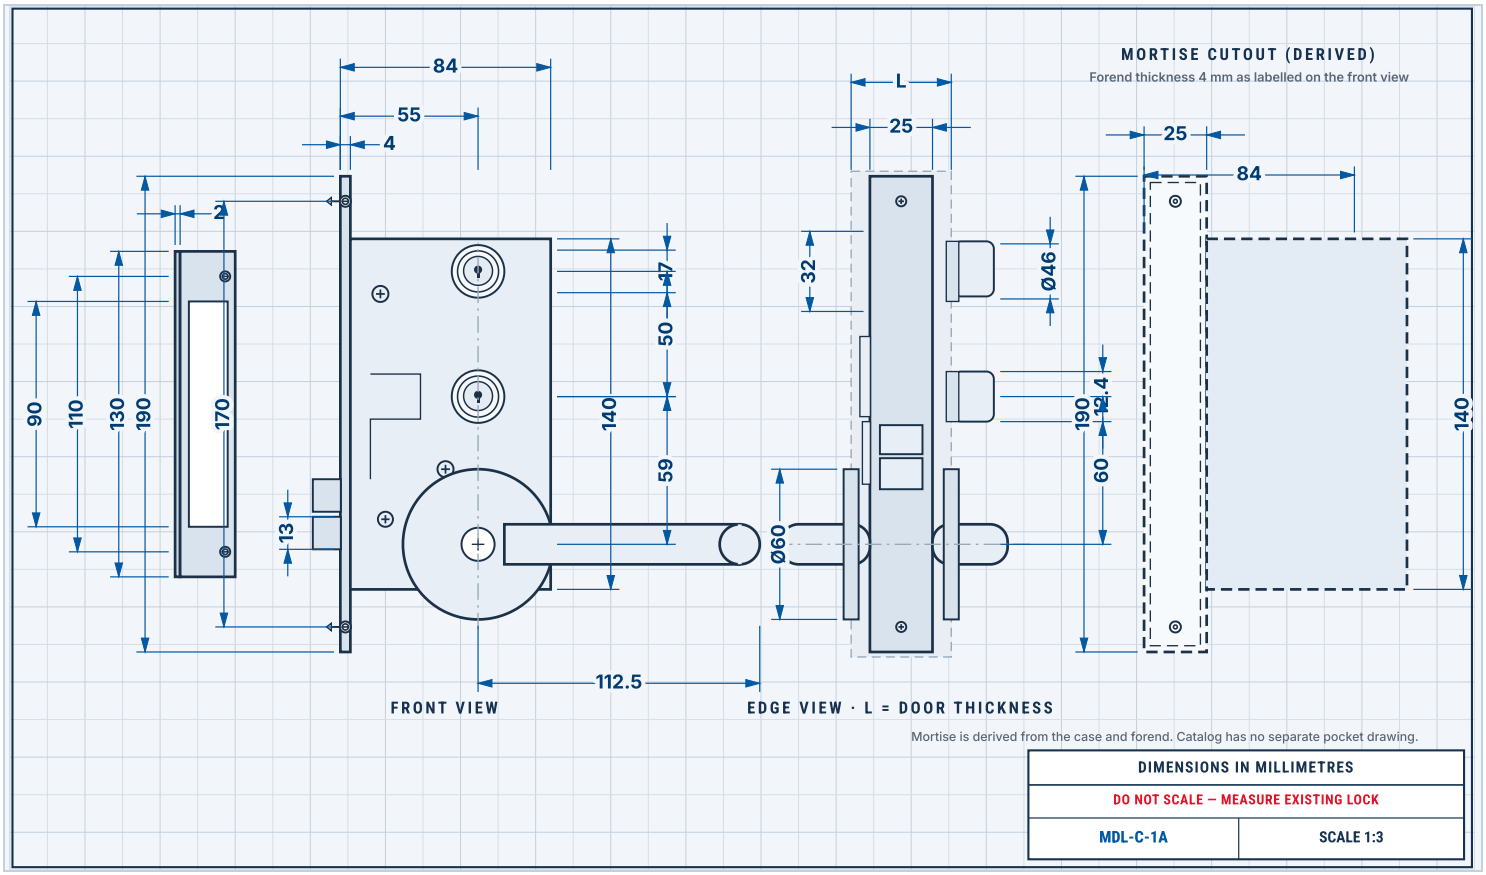

REPLACEMENT DIMENSIONS

Part number	MDL-C-1A
Type	Bi-cylinder cabin / fire-door mortise lock
Door thickness	36–45 mm
Backset	55 mm
Lock case	84 mm depth (incl. forend) × 140 mm height
Forend (faceplate)	190 × 25 mm; thickness 4 mm; fixing centres 170 mm
Strike plate	130 mm high; opening 90 mm; fixing centres 110 mm; lip 2 mm
Lever length	112.5 mm
Handle rose	Ø60 mm
Cylinder pitch	50 mm between centres; 59 mm from lower cylinder to spindle
Cylinder rose (edge)	Ø46 mm
Spindle size / handing / throw	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (36–45 mm range)
- Backset (55 mm) and forend thickness (4 mm)
- Forend size and screw centres (190 × 25, 170 mm)
- Two-cylinder spacing (50 mm) and 59 mm to the spindle
- Handle rose Ø60 mm vs. existing furniture
- Strike height, opening and screw centres
- Mortise pocket vs. existing door cutout
- Spindle size, handing and bolt throw (not labelled)

KEY FEATURES

- Two cylinders; keys operated in parallel from the outside
- Two square bolts
- Otherwise as MDL-C-1 (master-key system, windproof latch)
- Supplied with strike plate
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082