P/N MDL-C-1Y

Marine Panic-Bar / Exit-Device Lock (Three-Point)

Cerradura de barra antipánico / dispositivo de salida (tres puntos)

Horizontal three-body, three-latch linked lock for escape doors 60 mm thick and above. Outside: single cylinder, master key and lever handle. Inside: a panic bar. Three latches spring out automatically to lock. The outside handle opens the latches unless the cylinder is set to safe/lock. Inside, the bar always opens the latches and the vertical (tiandi) shoot bolts, regardless of the outside cylinder — escape function. Vertical spacing of the three lock bodies is not given on the catalog drawing.

Genuine OEM equivalent available on request.

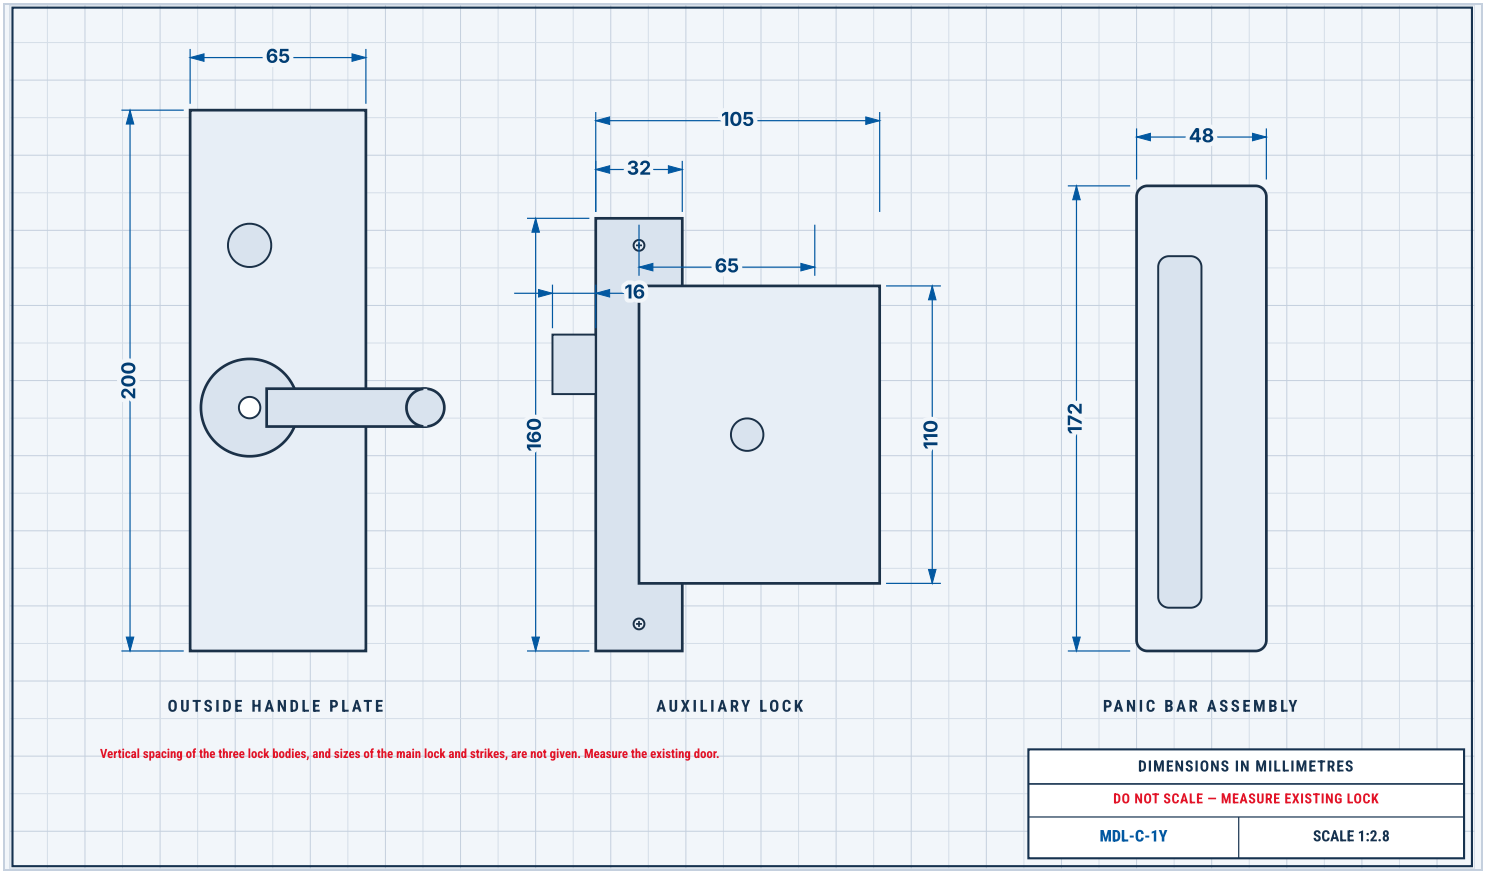

REPLACEMENT DIMENSIONS

Part number	MDL-C-1Y
Type	Panic-bar / three-point exit-device lock
Door thickness	60 mm and above
Outside handle plate	200 mm high × 65 mm wide
Auxiliary lock	160 mm high; forend 32 mm; throw 16 mm; 65 / 105 / 110 mm as drawn
Main lock	Not dimensioned on the catalog drawing
Panic bar assembly	172 mm × 48 mm
Strikes	Shown; not dimensioned
Vertical spacing of the three bodies	Not given — measure the existing door
Spindle size / handing	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (60 mm and above)
- Outside handle plate 200 × 65 mm
- Auxiliary lock 160 mm high, throw 16 mm
- Panic bar 172 × 48 mm
- Vertical spacing of the three lock bodies — not given; measure the existing door
- Main lock and strike sizes — not given; measure the existing parts
- Confirm escape-function (inside bar always opens) matches the door

KEY FEATURES

- For escape doors 60 mm thick and above
- Three-point latching with vertical shoot bolts
- Outside: cylinder, master key and lever
- Inside panic bar always opens the door (escape function)
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082