P/N MDL-C-2

Marine Door Lock for Steel / Watertight Doors

Cerradura para puertas de acero / estancas

Double-bolt, single-cylinder lock for watertight or steel doors about 40 mm thick. The inclined latch is opened by the lever; the square bolt is opened by the key or the knob.

Genuine OEM equivalent available on request.

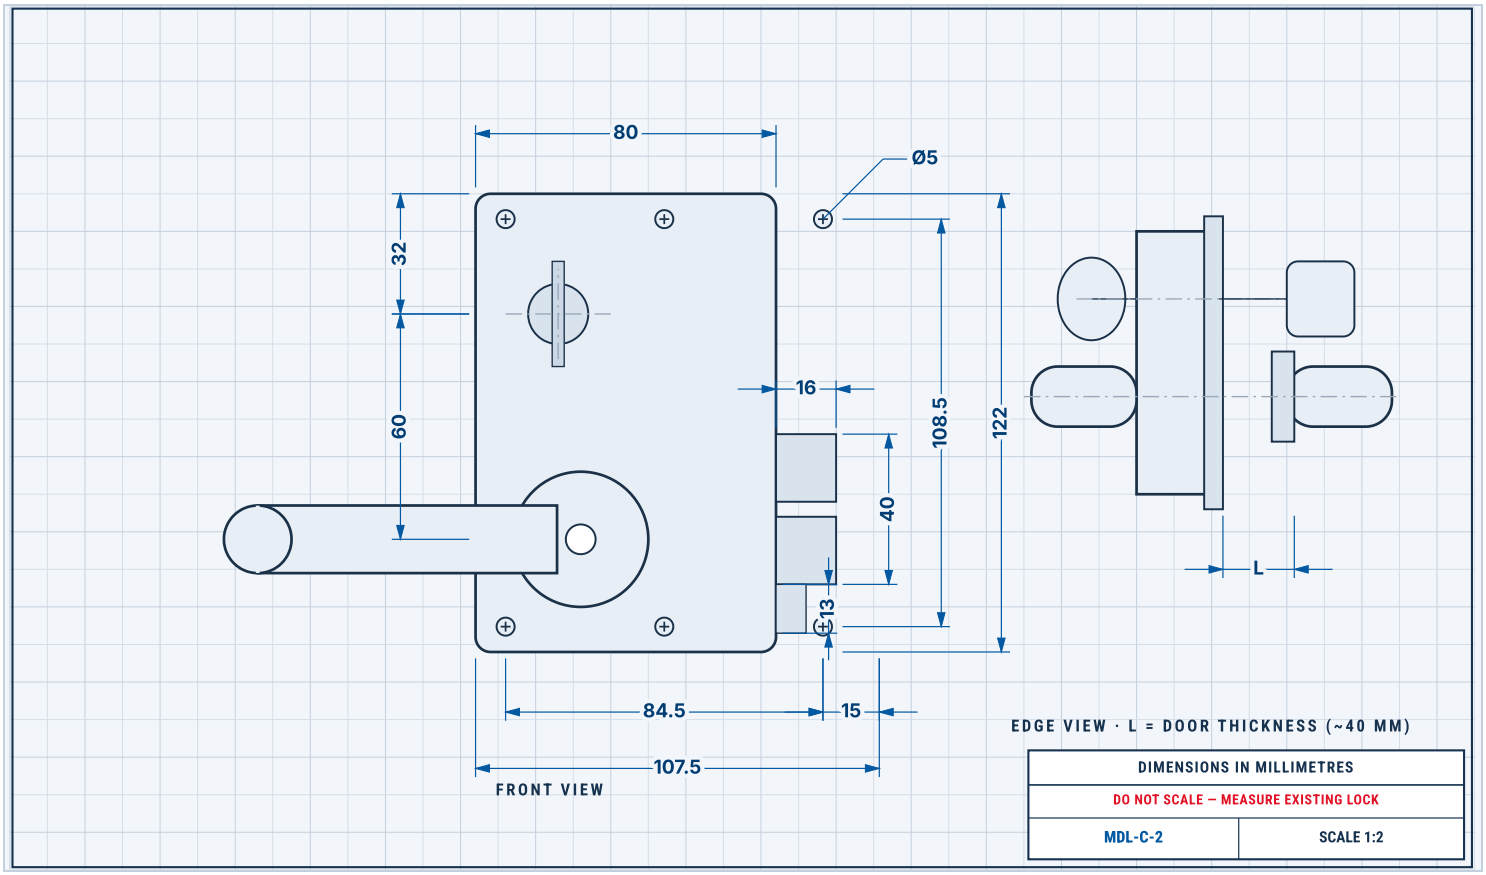

REPLACEMENT DIMENSIONS

Part number	MDL-C-2
Type	Steel / watertight door lock, double bolt
Door thickness	About 40 mm (L on the drawing is door-dependent)
Lock case	80 mm wide × 122 mm high
Overall width	107.5 mm
Horizontal screw span	84.5 mm, then 15 mm
Vertical screw centres	108.5 mm
Top to cylinder centre	32 mm; cylinder to handle centre 60 mm
Bolt projection	16 mm
Bolt stack height	40 mm; lower inset 13 mm
Screw hole	Ø5 mm (labelled at one top screw)
Spindle size / handing	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (about 40 mm)
- Case size 80 × 122 mm vs. existing body
- Overall width 107.5 mm and screw spans 84.5 / 108.5 mm
- Bolt projection 16 mm and stack 40 mm
- Handle and cylinder positions (32 / 60 mm)
- Spindle size and handing (not labelled)

KEY FEATURES

- For steel or watertight doors about 40 mm thick
- Double bolts, single cylinder
- Inclined latch opened by the lever
- Square bolt opened by key or knob
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082