P/N MDL-C-2A

Marine Rim / Surface Door Lock, Splash-Proof

Cerradura de sobreponer, antisalpicadura

Single-bolt, single-cylinder rim (surface) lock with master key, for steel or watertight doors about 40 mm thick. The deadbolt is unlocked by the inside knob and locked or unlocked by the outside key. A splash-proof cover is available. The dimensioned drawing shows a 75 × 110 × 22 mm body; catalog text states a 95 mm body width — use the drawing and measure the existing lock.

Genuine OEM equivalent available on request.

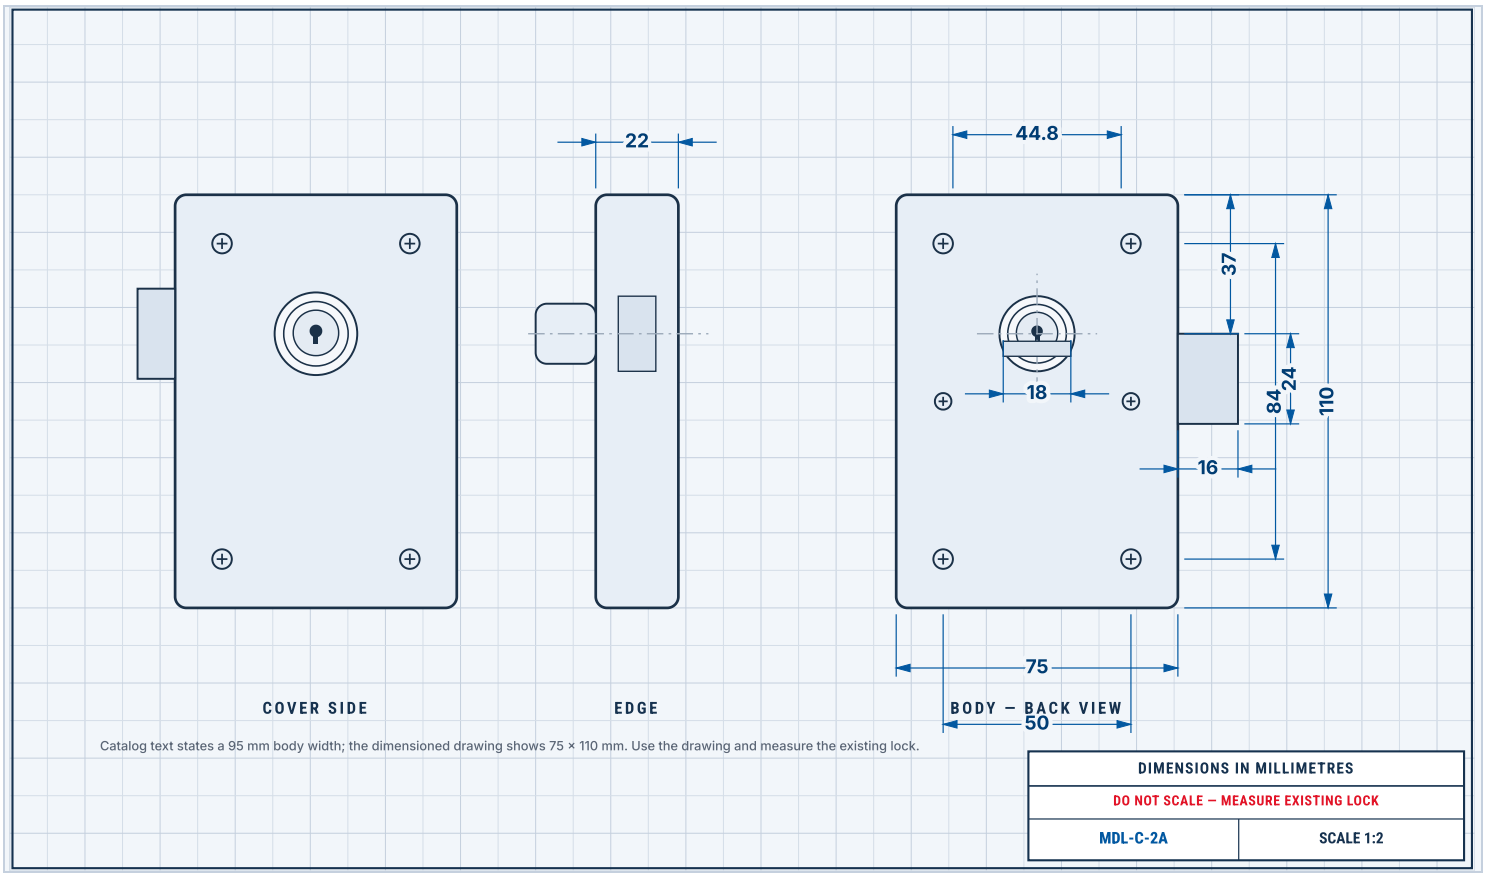

REPLACEMENT DIMENSIONS

Part number	MDL-C-2A
Type	Rim / surface lock, splash-proof cover available
Door thickness	About 40 mm
Body (drawing)	75 × 110 mm, thickness 22 mm
Body width (catalog text)	95 mm — conflicts with the drawing; do not use as a hard spec
Partial width	44.8 mm
Horizontal screw spacing	50 mm
Vertical screw spacing	84 mm
Top to cylinder centre	37 mm; onward 24 mm
Bolt projection	16 mm
Thumbturn / spindle width	18 mm
Spindle size / handing	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Confirm this is a rim / surface lock, not a mortise
- Body 75 × 110 × 22 mm (drawing) vs. the existing lock — catalog text says 95 mm
- Screw spacing 50 × 84 mm
- Bolt projection 16 mm
- Door thickness about 40 mm
- Whether a splash-proof cover is required

KEY FEATURES

- Rim / surface body (not a mortise lock)
- Single bolt, single cylinder, master key
- Deadbolt by inside knob and outside key
- Splash-proof cover available
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082