MANTTO OFFSHORE
WWW.MANTTO.COM

PRODUCT SPECIFICATION SHEET
MDL-C-5

P/N MDL-C-5

Marine Passageway Door Lock

Cerradura de paso (pasillo)

Passageway mortise lock with a single inclined (windproof) latch, opened by the lever handle. No cylinder and no deadbolt are described. Door thickness 36–45 mm. This is the base body used by MDL-C-1F and MDL-C-4B.

Genuine OEM equivalent available on request.

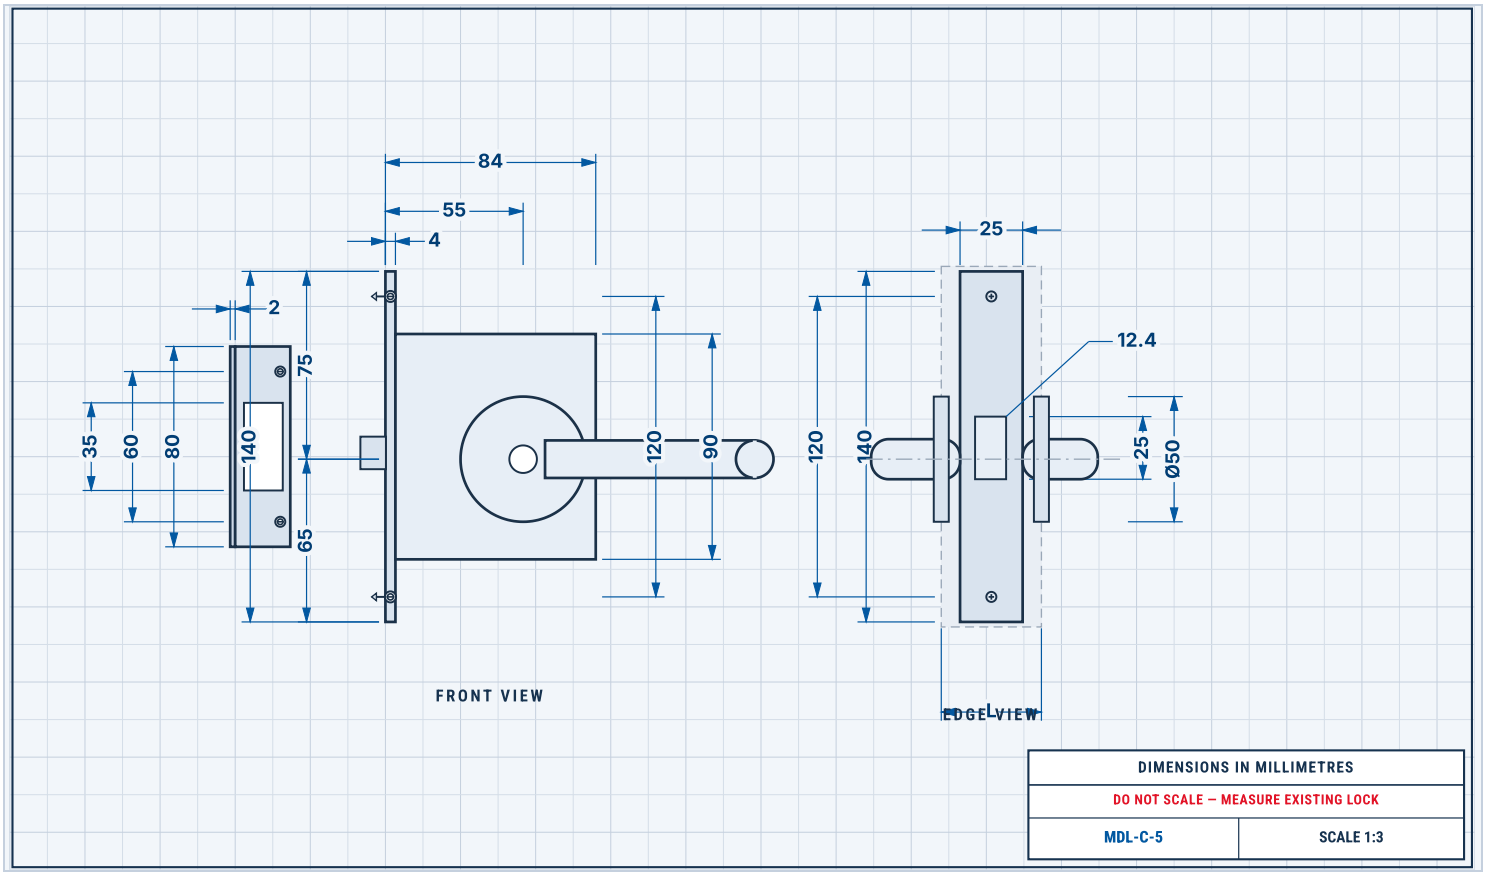

REPLACEMENT DIMENSIONS

Part number	MDL-C-5
Type	Passageway mortise lock, single latch
Door thickness	36–45 mm (L on the edge view is not numbered)
Backset	55 mm
Lock case	84 mm depth (incl. forend) × 90 mm height
Forend (faceplate)	140 mm high × 25 mm wide; thickness 4 mm; fixing centres 120 mm (75 mm above the handle, 65 mm below)
Strike plate	80 mm high; opening 35 mm; fixing centres 60 mm; lip 2 mm
Latch face	12.4 × 25 mm
Latch throw / spindle / handing	Throw is not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (36–45 mm range; L is not numbered)
- Backset 55 mm and case 84 × 90 mm
- Forend 140 × 25 × 4 mm, centres 120 mm
- Handle position 65 mm up from the bottom of the forend, 75 mm down from the top
- Strike 80 / 60 / 35 / lip 2
- Latch face 12.4 × 25 mm
- Confirm no cylinder / no deadbolt matches the existing lock
- Latch throw, spindle size and handing (throw not labelled)

KEY FEATURES

- Passageway lock, single inclined latch, opened by the lever
- No cylinder and no deadbolt on this model
- Base body for the long-faceplate variants MDL-C-1F and MDL-C-4B
- Supplied with strike plate
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082