P/N MDL-CTD

Marine Special-Door Lock with Vertical Shoot Bolts

Cerradura para puertas especiales con pestillos verticales (tiandi)

Special-door lock with a movable bolt, deadbolts and tiandi (top-and-bottom) shoot bolts, for typically double doors 40–50 mm thick. The small lever retracts the movable bolt. The large lever drives the upper and lower locks plus the tiandi bolts. Once locked by key inside or outside, the large lever cannot be unlocked.

Genuine OEM equivalent available on request.

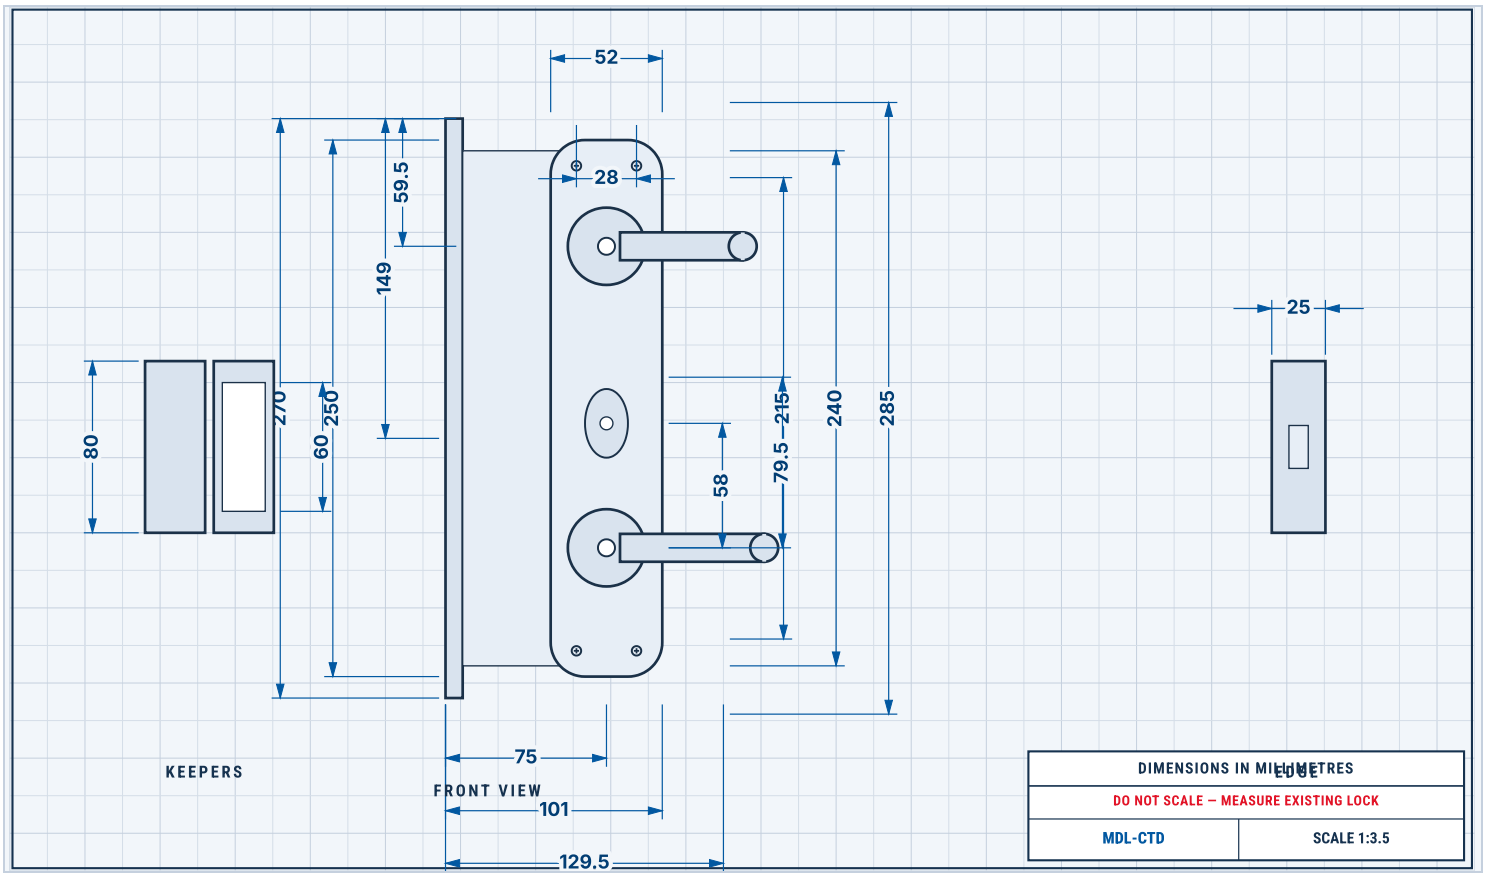

REPLACEMENT DIMENSIONS

Part number	MDL-CTD
Type	Special-door lock with tiandi shoot bolts, two levers
Door thickness	40–50 mm
Faceplate / body height	270 mm (250 / 149 / 59.5 mm as drawn)
Nested body heights	215 / 240 / 285 mm
Depths from forend face	75 / 101 / 129.5 mm
Handle plate width	52 mm; screw spacing 28 mm
Cylinder to lower handle	58 mm; 79.5 mm as drawn
Keepers	80 mm high; inner 60 mm
Edge / forend width	25 mm
Spindle size / handing / throws	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Door thickness (40–50 mm range)
- Faceplate height 270 mm and widths 52 / 28 mm
- Depths 75 / 101 / 129.5 mm vs. the existing door
- Keeper 80 / 60 mm
- Handle and cylinder positions (58 / 79.5 mm)
- Confirm two-lever + shoot-bolt arrangement matches the existing door
- Spindle size, handing and bolt throws (not labelled)

KEY FEATURES

- For special (typically double) doors 40–50 mm thick
- Tiandi (top-and-bottom) shoot bolts
- Two levers and a cylinder
- Key locking from inside or outside holds the large lever
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082