P/N MDL-C-3

Marine Sliding-Door Lock, Hook Bolt

Cerradura de gancho para puerta corrediza

Hook-bolt lock for marine sliding doors. The lever opens the sliding door. If the hook is closed by the inside knob or the outside key, the lever cannot open the door. Single cylinder. Door thickness 36–45 mm.

Genuine OEM equivalent available on request.

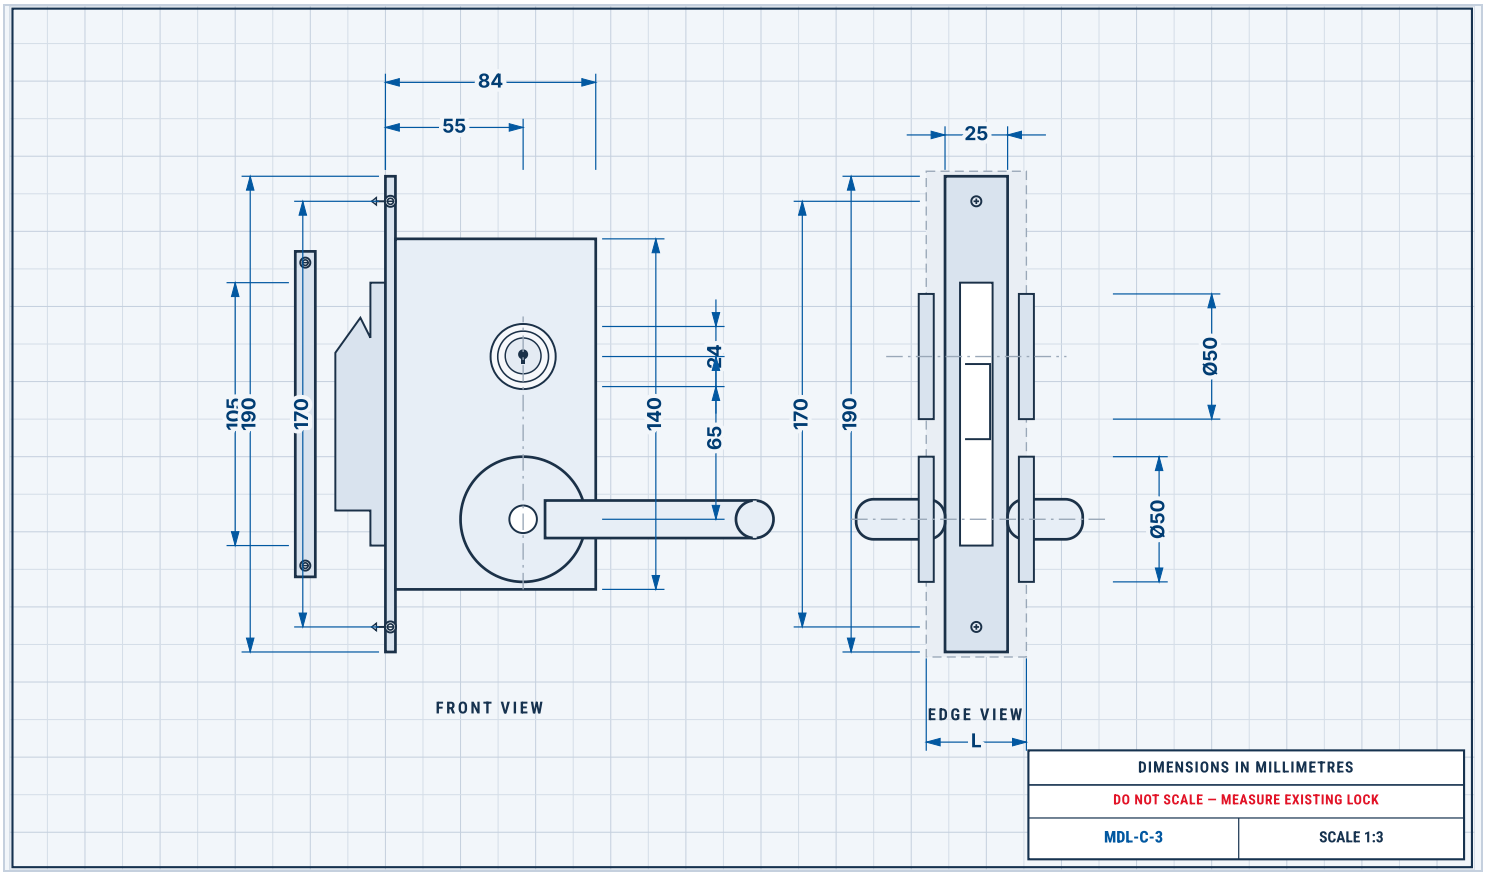

REPLACEMENT DIMENSIONS

Part number	MDL-C-3
Type	Sliding-door hook-bolt lock
Door thickness	36–45 mm (L on the edge view is not numbered)
Backset	55 mm
Lock case	84 mm depth (incl. forend) × 140 mm height
Forend (faceplate)	190 mm high × 25 mm wide; fixing centres 170 mm
Forend thickness	Not labelled — measure the existing lock
Hook strike / hook height	105 mm
Cylinder housing	24 mm; cylinder-to-handle 65 mm
Handle rose	Ø50 mm (edge view)
Spindle size / handing / throw	Not labelled — measure the existing lock

REPLACEMENT FIT — MEASURE YOUR EXISTING LOCK

- Confirm the existing door is a sliding door (hook bolt, not a hinged-door latch)
- Door thickness (36–45 mm range; L is not numbered)
- Backset 55 mm and case 84 × 140 mm
- Forend size and screw centres (190 × 25, 170 mm)
- Hook strike / hook height 105 mm
- Cylinder-to-handle spacing 65 mm
- Handle rose Ø50 mm vs. existing furniture
- Spindle size, handing and hook throw (not labelled)

KEY FEATURES

- Hook-bolt sliding-door lock, single cylinder
- Lever opens the door; hook locks the lever when thrown
- Case size matches the C-1 family, but this is a hook-bolt slider, not a mortise latch/deadbolt set
- Supplied with hook strike
- Genuine OEM equivalent available on request

PRODUCT



www.mantto.com
sales@mantto.com
+1 956 627 1082